


## RESOLUX WIND LIGHT FT

RECESSED LIGHT



### APPLICATIONS

TOWERS

NACELLES

<p><b>Advantage:</b></p> <p><b>Base:</b></p> <p><b>Diffuser:</b></p> <p><b>Reflector:</b></p> <p><b>Clips:</b></p> <p><b>Electrical specifications:</b></p> <p><b>Input specifications:</b></p> <p><b>Wiring:</b></p> <p><b>Emergency:</b></p> <p><b>Heat:</b></p> <p><b>Thermostat:</b></p> <p><b>Certificate:</b></p> <p><b>Class:</b></p> <p><b>Warranty:</b></p>	<p>Rounded shapes, Clips do not fall of, Vibration resistant.</p> <p>Glass reinforced polyester, compression moulded (GRP).</p> <p>Injected linear prismatic UV stabilized diffuser in polycarbonate (PC).</p> <p>White painted metal gear tray, hingeable on the stainless steel reflector retaining clip for ease of maintenance.</p> <p>Stainless steel or one part polyamide clips (mounted so they do not fall down).</p> <p>Electronic ballast (cold start or preheat).</p> <p>230 V / 50-60 Hz, 120-277 V / 50-60 Hz, 110 V / 50 Hz &amp; 110 V / 60 Hz, 12 V DC &amp; 24 V DC.</p> <p>Special wiring and mounting in particular to resist vibrations.</p> <p>60/90/120 minutes, all specially boosted for high lumen output (conform to EN 50308).</p> <p>40W heating element to ensure 100% battery function down to -40°C.</p> <p>The thermostat ensures that the temperature in the light fixture is always between 5-15°C.</p> <p>Approved for UL standard UL-1598, UL/CSA, CE, CCC.</p> <p>IP65.</p> <p>5 years.</p>
--	---




Resolux ApS  
Tjørnevej 6  
DK-5853 Ørbæk

Phone +45 62 25 26 23  
Fax +45 62 25 26 21


resolux@resolux.dk  
www.resolux.dk

## RESOLUX WIND LIGHT FT


### RECESSED LIGHT

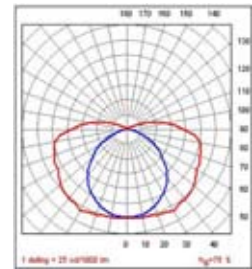

FT 1x36 T

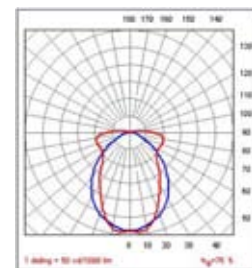

FT 1x58 T8 SMALL  
AL reflector

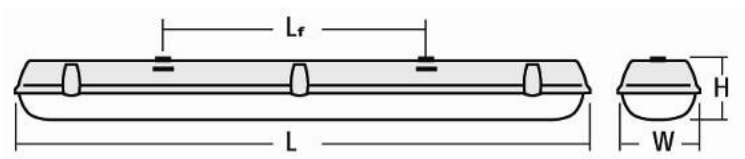

### PRODUCT TYPES

RESOLUX WIND LIGHT FU									
TYPE	L	W	H	LF <sub>(STANDARD)</sub>	LF <sub>(ADJUSTED)</sub>	HF <sub>P(W)</sub>	LF <sub>I(A)</sub>		
CE RESOLUX WIND LIGHT FT IP65 1x18 T8	665	84	98,5	400	100-600	20,7	0,09		
UL RESOLUX WIND LIGHT FT IP65 1x17 T8	665	84	98,5	400	100-600	20,7	0,09		
CE RESOLUX WIND LIGHT FT IP65 1x36 T8	1275	84	98,5	800	100-1200	36,8	0,16		
UL RESOLUX WIND LIGHT FT IP65 1x32 T8	1275	84	98,5	800	100-1200	36,8	0,16		
CE RESOLUX WIND LIGHT FT IP65 1x58 T8	1575	84	98,5	1100	100-1500	57,5	0,25		
CE RESOLUX WIND LIGHT FT IP65 2x18 T8	665	134	98,5	400	100-600	36,8	0,16		
UL RESOLUX WIND LIGHT FT IP65 1x17 T8	665	134	98,5	400	100-600	36,8	0,16		
CE RESOLUX WIND LIGHT FT IP65 2x36 T8	1275	134	98,5	800	100-1200	75,9	0,33		
UL RESOLUX WIND LIGHT FT IP65 2x32 T8	1275	134	98,5	800	100-1200	75,9	0,33		
CE RESOLUX WIND LIGHT FT IP65 2x58 T8	1575	134	98,5	1100	100-1500	117,3	0,51		